



- Loudspeaker: Directional/max. 121 dB(A)
- Type of protection: Ex d with Ex e connection chamber
- Class: IP66/67 (IEC 60529)
- Corrosion-resistant polyamide enclosure
- Including stainless steel fixings

E5

MY R. STAHL 8494A



The **8494 product series** is a range of 25 W or 15 W loudspeakers designed for use in hazardous and harsh environments. These are unique as they are constructed using antistatic polyamide which provides a lightweight, robust, corrosion-resistant enclosure. For ultimate flexibility, wattage, impedance and transformer variants with 25, 15, 6.5, 5, 2.5 and 1.5 W connections are available.

The variant with the short trumpet comes in a compact enclosure and provides wide sound distribution. The variant with the long trumpet provides an increased sound pressure level and improved audibility.

	IECEX / ATEX					
Zone	0	1	2	20	21	22
Installation in		•	•		•	•

	NEC® 500 CE Code Appendix J					
	Class I		Class II		Class III	
Division	1	2	1	2	1	2
Installation in	•	•	•	•		

	CE Code Section 18					
	NEC® 505			NEC® 506		
	Class I					
Zone	0	1	2	20	21	22
Installation in		•	•		•	•

Selection Table						
Flare size		Long trumpet				
Sound pressure level		max. 118 dB(A) @ 1 m				
Figure	Impedance	Product Type			Art. No.	Weight
	8 Ω	8494/C-L-EN-ST-12-00			242310	2.8 kg
	20 Ω	8494/C-L-EN-ST-13-00			242311	2.8 kg
	–	8494/C-L-EN-ST-14-00			242312	2.8 kg
Flare size		Short trumpet				
Sound pressure level		max. 115 dB(A) @ 1 m				
Figure	Impedance	Product Type			Art. No.	Weight
	8 Ω	8494/C-S-EN-ST-12-00			242300	2.2 kg
	20 Ω	8494/C-S-EN-ST-13-00			242301	2.2 kg
	–	8494/C-S-EN-ST-14-00			242302	2.2 kg

Technical Data	
Explosion Protection	
IECEX gas explosion protection	Ex de mb IIC T4 Gb
IECEX dust explosion protection	Ex tb IIIC T105 °C Db
ATEX gas explosion protection	Ⓔ II 2 G Ex de mb IIC T4 Gb
ATEX dust explosion protection	Ⓔ II 2 D Ex tb IIIC T105 °C Db
Certificates	ATEX (PRE), Canada / USA (LC), IECEX (PRE)

Technical Data	
Electrical Data	
Power	25 W
Frequency range	450 – 6000 Hz
Ambient Conditions	
Ambient temperature °C	-50 – 60 °C
Mechanical Data	
Degree of protection (IP) (IEC 60529)	IP66/IP67
Enclosure material	Polyamide, antistatic
Enclosure colour	Black
Trumpet material	Polyamide, antistatic
Max. solid connection terminals	4 mm ²
Max. finely stranded connection terminals	4 mm ²
Mounting / Installation	
Mounting part material	Polyamide, antistatic
Connection type	Spring clamp terminal
Components	
Drilled holes	2 x M20
Cable glands and entries	Can be ordered as accessories
Stopping plugs	2 x dust cap



You can find more technical data online at r-stahl.com. MY R. STAHL 8494A

Accessories			
Figure	Description	Art. No.	Weight
Cable gland made of plastic			
	8161/7-M20-1304, Ex e Plastic, M20 x 1.5, cable outer diameter 4 to 13 mm Lot size 50 pieces	239156	13 g
Stopping plug			
	8290/3-M20 Plastic, M20 x 1.5 Lot size 1 piece	143522	7 g
	8290/3-M20 Plastic, M20 x 1.5 Lot size 100 pieces	285773	500 g



Stainless steel bracket available on request.
*) Purchase order quantity in [no. of units]; the delivery quantity is automatically rounded to the delivery lot.

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

E5

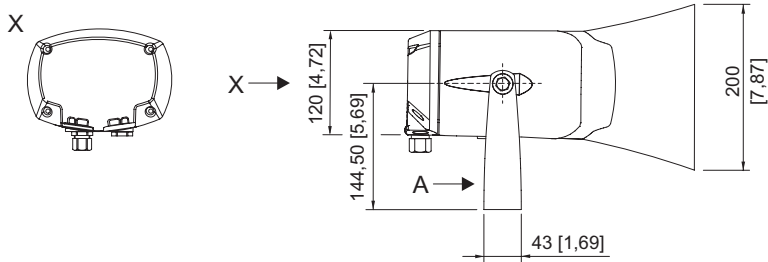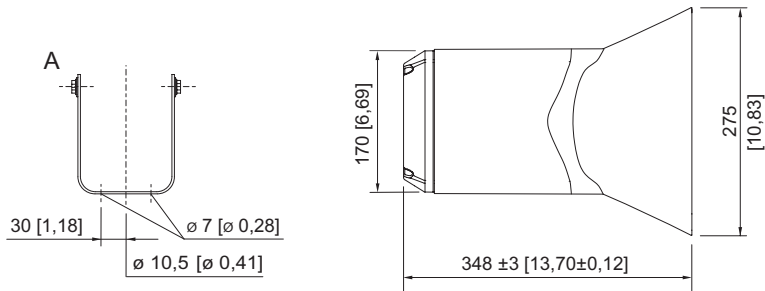

Hazardous area loudspeaker – long trumpet
Bracket (A) supplied as standard

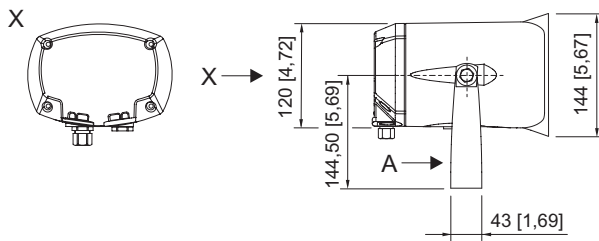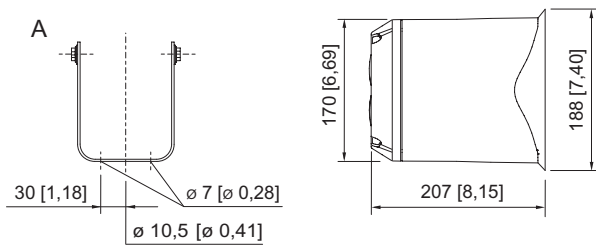

Hazardous area loudspeaker – short trumpet
Bracket (A) supplied as standard