

# Control Devices

## Control device for panel mounting

Ex e

8003/131-001 UL Art. No. 127125



PanSiG



- Flexible configuration due to pushbutton, mushroom push-button, mushroom stay-put button, mushroom stay-put button with key lock, key-operated button, key-operated switch
- Easy assembly thanks to single-hole mounting
- Codable "latching", "spring return", "key not removable" functions
- Spring clamp terminals with connection chamber

MY R. STAHL 8003A



The switches and control buttons for R. STAHL series 8003 panel mounting devices have various switching functions in latching and spring return versions, which can be subsequently recoded, up to 6 A. They are completely certified, explosion-protected equipment with Ex e connection chambers. With the patented mounting mechanism, panel mounting with normal drilled holes of 30.5 mm is quick and easy.

The right actuators are available for a comprehensive range of applications.

## Technical Data

### Explosion Protection

Scope of validity	European Union (ATEX) CEC IECEX NEC
Application range (zones)	1 2 21 22
IECEX gas certificate	IECEX PTB 06.0065X
IECEX gas explosion protection	Ex db eb IIC T6 Gb
IECEX dust certificate	IECEX PTB 06.0065X
IECEX dust explosion protection	Ex tb IIIC T80 °C Db
ATEX gas certificate	PTB 02 ATEX 1057 X
ATEX gas explosion protection	⊕ II 2 G Ex db eb IIC T6 Gb
ATEX dust certificate	PTB 02 ATEX 1057 X
ATEX dust explosion protection	⊕ II 2 D Ex tb IIIC T80 °C Db
Certificates	ATEX (PTB), Canada (UL), IECEX (PTB), Korea (KGS), USA (UL)
Declaration of Conformity	ATEX (EUK), ATEX (Simple apparatus), China (CCC), Declaration of Conformity (ATEX)
Notes	Product label may vary. Series devices have certification according to ATEX, IECEX, NEC® and CE Code.

### Electrical Data

Rated operational voltage AC	500 V
Rated operational current	6 A
Switching capacity AC-12	500 V / 6 A / max. 3000 VA
Switching capacity AC-15	400 V / 6 A / max. 1250 VA
Switching capacity DC-13	110 V / 1 A / max. 110 W

# Control Devices

Control device for panel mounting

Ex e

8003/131-001 UL Art. No. 127125



## Electrical Data

Switching capacity DC-13<SoftReturn/>2 contact elements in series	60 V/6 A
---	----------

## Ambient Conditions

Ambient temperature	-20 °C ... +60 °C
Ambient temperature	-4 °F ... +140 °F
Ambient temperature NEC®	-30 °C ... +60 °C
Ambient temperature NEC®	-22 °F ... +140 °F

## Mechanical Data

Degree of protection (IP) (IEC 60529)	Reverse side IP65, front side IP66
Enclosure material	Polyamide
Contact material	Silver-nickel
Silicone-free	Yes
Number of NOs	2
Connection cross-section	0.75 ... 1.5 mm <sup>2</sup>
Connection cross-section AWG	18 AWG ... 12 AWG
Depth of cut-out	130 mm
Mounting depth, inches	5.12 in
Service life, min.	10 <sup>5</sup> operating cycles
Weight	140 g
Weight	0.31 lb


## Mounting / Installation

Tightening torque	3 Nm
Tightening torque lbf in	26.55 lbf in




## Components

Actuator	Pushbutton
Entry 1	8161/7-M16-0902
Entry 1 type	Polyamide cable gland, black

## Technical Drawings – Subject to Alterations



## Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

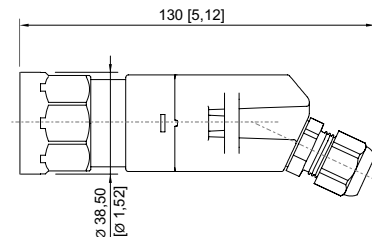


# Control Devices

Control device for panel mounting

Ex e

8003/131-001 UL Art. No. 127125

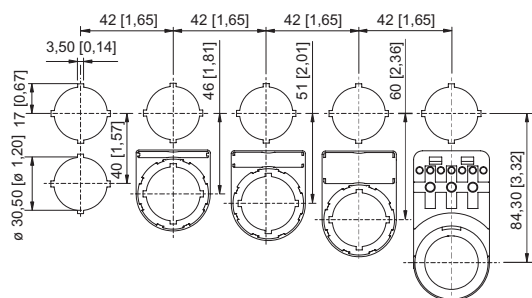

Cut-out with/without additional designation plate

## Accessories

### Actuator



Pushbutton

Art. No.

155525

### Locking devices



8602A0753 H24 for not actuated pushbutton/selector switch  
BG001, BG005

Art. No.

155372



8602A0754 for actuated pushbutton/selector switch  
BG001, BG005

155402



8602A0755 for not actuated pushbutton/selector switch  
BG001, BG005

155431

### Protective collar



8602A0751 metal  
for pushbutton/selector switch/mushroom stay-put button with key lock/mushroom stay-put  
button/mushroom pushbutton dia. 39  
BG001, BG003, BG005, BG008, BG009, BG010, BG012

Art. No.

155326

## Spare Parts

### Label mount



Label mount, size 1, without symbol label  
Text: 1 line  
for actuators to fit Ø 30.5 mm holes

Art. No.

155632



Label mount, size 2, without symbol label  
Text: 1 or 2 lines  
for actuators to fit Ø 30.5 mm holes

155687


## Control Devices

Control device for panel mounting


Ex e


8003/131-001 UL Art. No. 127125


STAHL


	Label mount, size 3, without symbol label Text: 1, 2 or 3 lines for actuators to fit Ø 30.5 mm holes	155844
--	--	--------


Symbol label for pushbutton and selector switch		Art. No.
---	--	----------


	Colour: blue Please specify text or symbol	155910
--	---	--------


	Colour: green Please specify text or symbol	155900
--	--	--------


	Colour: white Text: START	155889
--	------------------------------	--------


	Colour: blue Text: RESET	155894
---	-----------------------------	--------


	Colour: green Text: START	155721
--	------------------------------	--------

	Colour: black Text: Ab	155886
--	---------------------------	--------

	Colour: black Text: Auf	155883
--	----------------------------	--------

	Colour: black Symbol: Arrow	155749
--	--------------------------------	--------

	Colour: black Symbol: Arrow	155761
--	--------------------------------	--------

	Colour: black Text: Links	155827
--	------------------------------	--------







# Control Devices

Control device for panel mounting

Ex e


8003/131-001 UL Art. No. 127125



	Colour: black Text: Rechts	155837
	Colour: black Text: Open	155868
	Colour: black Text: CLOSE	155878
	Colour: black Text: Zu	155874
	Colour: red Text: OFF	155654
	Colour: green Text: ON	155671


## Insert discs for label holder

Art. No.

	One-line Plain Material: PVC Colour: White Self-adhesive	238271
--	--	--------


## Symbol label for pushbutton and selector switch

Art. No.

	Colour: red Text: AUS	155634
--	--------------------------	--------


## Insert discs for label holder

Art. No.

	Two-line Plain Material: PVC Colour: White Self-adhesive	238272
--	--	--------

## Symbol label for pushbutton and selector switch

Art. No.

	Colour: black Text: AUS	155806
--	----------------------------	--------

# Control Devices

Control device for panel mounting


Ex e

8003/131-001 UL Art. No. 127125






## Insert discs for label holder

Art. No.

	Three-line Plain Material: PVC Colour: White Self-adhesive	238273
--	--	--------


## Symbol label for pushbutton and selector switch

Art. No.

	Colour: black Text: EIN	155862
	Colour: red Text: STOP	155615
	Colour: black Text: STOP	155795

## Closing part

Art. No.

	8602C3-733-B for closing unused holes in cover, dia. 30.5 mm, NBR	244306
	8602C3-733-S for closing unused holes in cover, dia. 30.5 mm, silicone	244307

## Symbol label for pushbutton and selector switch

Art. No.

	Colour: black Text: I	155846
	Colour: green Text: I	155689
	Colour: white Text: I	155892
	Colour: black Text: II	155854
	Colour: green Text: II	155706

## Control Devices

Control device for panel mounting

Ex e

8003/131-001 UL Art. No. 127125



	Colour: red Text: O	155596
	Colour: black Text: O	155783
	Colour: black Text: I O	155771
	Colour: blue Blank label without text	155911
	Colour: yellow Blank label without text	155914
	Colour: red Blank label without text	155897
	Colour: green Blank label without text	155901
	Colour: white Blank label without text	155908
	Colour: black Blank label without text	155905

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.