


CMP-63E1FW Art. No. 246447



- Ex d and Ex e cable entries for cables with SWA armouring
- Designed to prevent cold flow
- Worldwide certification in accordance with IECEx, ATEX and cCSAus, EMC-tested

MY R. STAHL E1FWA

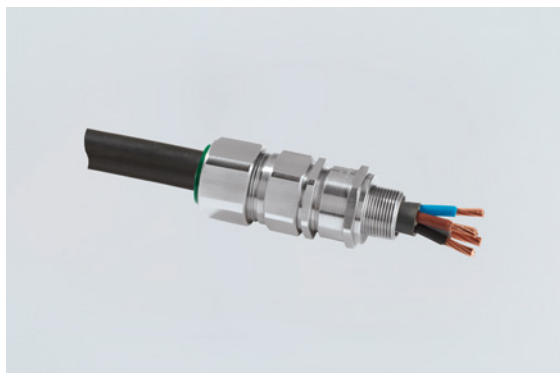

E1FW series metal Ex d and Ex e cable entries are suitable for the following specific types of armoured cables: SWA and tape-type steel and aluminium armouring. They feature a special holder for the armouring and various seals. They are also designed to prevent cold flow and are EMC-tested.

Technical Data

Explosion Protection

Ex version	Ex e & Ex d & Ex nR & Ex ta
Application range (zones)	1 2 20 21 22
IECEX gas certificate	IECEX CML 18.0181X
IECEX gas certificate 2	IECEX SIM 14.0007 X
IECEX gas explosion protection	Ex db IIC Gb
IECEX dust certificate	IECEX CML 18.0181X
IECEX dust explosion protection	Ex ta IIIC Da
IECEX firedamp certificate	IECEX CML 18.0181X
IECEX firedamp protection	Ex db I Mb
IECEX firedamp protection 2	Ex eb I Mb
IECEX restricted breathing certificate	IECEX CML 18.0181X
IECEX restricted breathing	Ex nR IIC Gc
ATEX gas certificate	CML 18ATEX1324X
ATEX gas certificate 2	CML 18ATEX4316X
ATEX gas explosion protection	Ex II 2 G Ex db IIC Gb
ATEX dust certificate	CML 18ATEX1324X
ATEX dust explosion protection	Ex II 1 D Ex ta IIIC Da
ATEX firedamp certificate	CML 18ATEX1324X
ATEX firedamp protection	Ex I M2 Ex db I Mb
ATEX firedamp protection 2	Ex I M2 Ex eb I Mb
ATEX restricted breathing certificate	CML 18ATEX1324X
ATEX restricted breathing	Ex II 3 G Ex nR IIC Gc

CMP-63E1FW Art. No. 246447

Explosion Protection

Notes	The product certification and certificates can be downloaded from the manufacturer's homepage (www.cmp-products.com)
-------	---


Ambient Conditions

Ambient temperature	-60 °C ... +130 °C
---------------------	--------------------

Mechanical Data

Version	63
Degree of protection (IP)	IP66
Degree of protection note	IP67 and IP68 mounting in accordance with the specifications of the manufacturer, CMP
Material	Nickel-plated brass
Silicone-free	Yes
Clamping range	54.6 – 65.8 mm
Armouring type	Steel wire armouring
Min. armour wire thickness	2 mm
Max. armour wire thickness	2.5 mm
Clamping range	54.6 ... 65.8 mm
Width across corners	88 mm
Width across flats	80 mm
Thread size	NPT2-1/2
Thread length	39.9 mm
Thread standard	NPT
Gland size	63
Stepped cone	2 ... 2.5 mm
Inner sheath	47.2 ... 55.9 mm
Outer sheath	54.6 ... 65.8 mm
Protrusion length	104 mm
Impact strength (IEC 60079)	7 J
Impact strength	20 J
PVC boot	PVC25
Lot size	1
Weight	1.34 kg
Weight	2.95 lb

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations



- A = Inner sheath
- B = Outer sheath
- C = Thread size
- D = Width across corners
- D = Width across flats
- E = Thread length
- F = Protrusion length

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.