

# Operating and monitoring systems

KVM system SERIES 600

Device platform MANTA

OS MT-667-DVI3-SM



- KVM Operator Station, 22" display, 1680 x 1050
- Zone 2, 22 unit
- Display of the 19" (1280 x 1024) resolution true to 5:4 format
- Optional resistive glass or foil touch screen
- Data transmission via single mode fibre optic up to 10 km.


WebCode **MT667A**



The OS MT-667-DVI3 HMI series includes KVM operator stations for hazardous zones 2 and 22. Their brilliant 22" widescreen displays with a resolution of 1680 x 1050 pixels (format 16:10), are available with or without touch screen. The stainless steel enclosures (SS304 or SS316L) are available with a front opening or in cleanroom-compliant design and with different mounting options. Country-specific keyboards, pointer instruments and RFID and barcode scanners are useful accessories making work easier and extending functionality. Data is transmitted via single mode fibre optic up to 10 km.

## KVM SYSTEMS INTEGRATION

### PC WORKSTATIONS

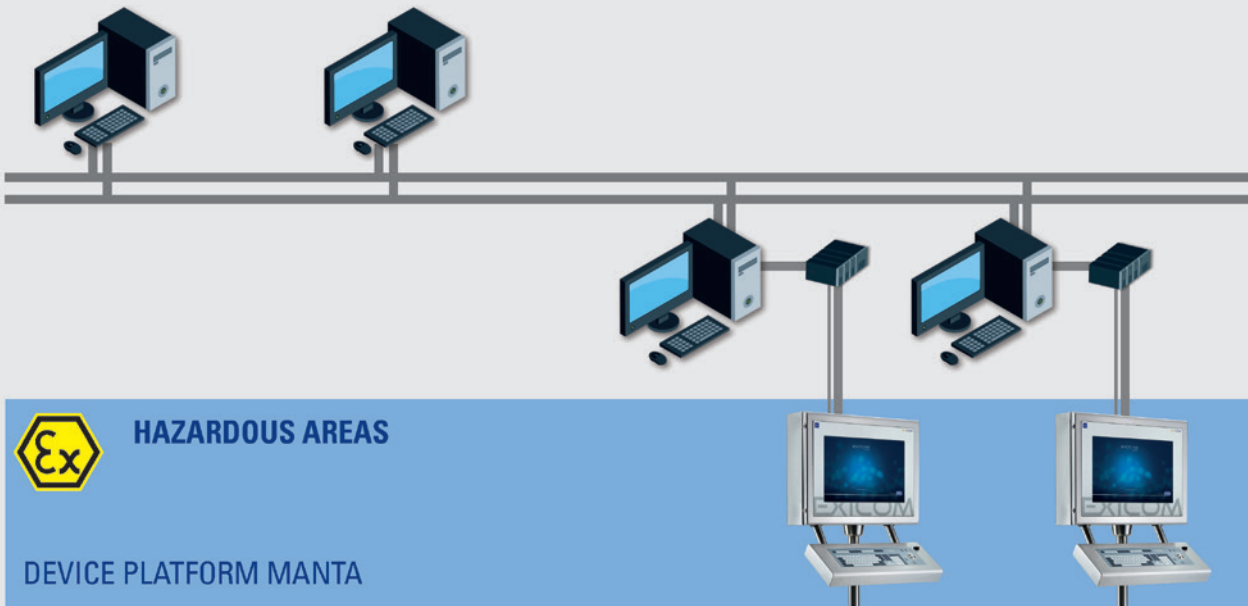

# Operating and monitoring systems

KVM system SERIES 600

Device platform MANTA

OS MT-667-DVI3-SM



## Technical Data

### General

Series	Product Series OS MT-667 (discontinued)
Product description	22" KVM system
Technology	Remote HMI KVM
HMI type	Operator Station
WebCode	MT667A

### Explosion Protection

Application range (zones)	2 22
Certifications	ATEX, IECEx, EAC, CNEX
IECEx certification	IECEx BVS 14.0034X
ATEX certification	BVS 12 ATEX E 033 X
CNEX certification	CNEX14.2205X
Notice certification	The certificates and explosion protection markings apply to a standard device combination with display, keyboard and enclosure. Any additional built-in or added components may have an impact on / change these.
IECEx gas explosion protection	Ex nA nR [ja op is Ga] IIC T4 Gc
IECEx dust explosion protection	Ex tc IIIC [ja op is Da] IP66 T110°C Dc
ATEX gas explosion protection	II 3(1) G Ex nA nR [ja op is Ga] IIC T4 Gc
ATEX dust explosion protection	II 3(1) D Ex tc IIIC [ja op is Da] IP66 T110°C Dc
CNEX gas explosion protection	Ex nA nR [ja op is Ga] IIC T4 Gc
CNEX dust explosion protection	Ex tc IIIC [ja op is Da] IP66 T110°C Dc

### Electrical Data

Rated operational voltage DC	24 V
Voltage range DC	20 – 30 V
Rated operational voltage AC	230 V
Voltage range AC	100 – 240 V
Power consumption DC	3 A
Power consumption AC 1	1 A
Protection fuse DC	5 AT
Protection fuse AC	5 AT
Rated operational power	typ. 50 W / 100 W with O30 / max. 150 W (typ. 170 BTU / 341 BTU with O30 / max. 510 BTU)
Transfer technology	KVM-DVI3
Ethernet / Data	Optical fibre single mode
Data cable	9/125 µm FO cable
Data cable length	max. 10 km
Interface medium	Single-mode optical fibre cable
Frequency range	50 – 60 Hz
Interface USB	2 x USB (Ex ia) 1 x USB (Ex nA) 2 x USB (Ex ia) (keyboard, pointing device)
Interface serial	1 x RS-232 (Ex nA)
Interface audio	1 x Audio Line in / out (Ex nA)
WLAN	optional via USB
Connection compartment	Power supply direct in integrated connection box

# Operating and monitoring systems

KVM system SERIES 600

Device platform MANTA

OS MT-667-DVI3-SM



## Electrical Data

Connections	via spring clamp terminals, green
Wiring	flexible cable up to 2.5 mm <sup>2</sup> (AWG14) fixed cable up to 4 mm <sup>2</sup> (AWG12)
Plug version FO	LC duplex connector
Max. input voltage U <sub>m</sub>	250 VAC

## Display

Display version	TFT Colour display
Display version 2	16.7 million colours
Display size inch	22
Display size centimetres	56
Display resolution	WSXGA+
Total pixels	1680 x 1050
Display dimensions	16:10
Display brightness	250 cd/m <sup>2</sup>
Display contrast	1000:1
Touchscreen	Optional resistive
Touchscreen technology	5-wire glass or membrane touch
Backlight	LED Technology
Backlight service life	50 000 h at +20 °C
Front plate (display)	Aluminium

## Ambient Conditions

Ambient temperature operation	-20 °C ... +55 °C
Ambient temperature operation 1	-30 °C ... +55 °C with heater version O30
Storage temperature	-30 °C ... +70 °C
Cold start temperature	-10 °C
Temperature note 1	The O30 version is only available for the AC version devices !
Temperature note 2	Operating temperature +55 °C for a maximum of 5 h, for constant operation (24/7) +50 °C.
Temperature note 3	Cold start temperature: If the HMI device is switched on at a temperature below -10 °C the display will need a certain amount of time to warm up until everything is clearly visible. Depending on how low the temperature is, this process may last up to 3 hours.
Temperature note general	The temperature details apply to a standard device combination with display, keyboard and enclosure. Any additional built-in or added components may have an impact on / change these.

## Mechanical Data

Dimensions (WxHxD)	740 mm x 872 mm x 400 mm
Weight	58.5 kg
Material front	Aluminium / stainless steel
Material back	Stainless steel
Ingress protection	IP66
Breather	optional
Keyboard note	With a keyboard with trackball, the operator station's ingress protection is reduced to IP54, when the trackball is moved.
Mechanical data note	The mechanical data apply to an FR enclosure with display and keyboard. Other enclosure types as well as any additional built-in or added components may have an impact on / change these.

# Operating and monitoring systems

KVM system SERIES 600

Device platform MANTA

OS MT-667-DVI3-SM



---

## Mounting / Installation

Enclosure type	Stainless steel enclosure (FR) optional clean room (CFR)
Mounting option	Wall, elbow, stand

## Components

Keyboard	optional, 107 keys with trackball / joystick / mouse / touchpad (Ex ia)
----------	---

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.