

# Isolator Barriers

## Switching repeater

Ex i field circuit

9170/21-12-21s Art. No. 203281



- Can be used up to SIL 2 (IEC/EN 61508)
- Wire-breakage and short-circuit monitoring system, which can be disconnected and issues alerts
- Optional line error transparency: The device notifies the control system directly of any field-side line faults via the signal output.

WebCode 9170A



9170 series Ex i switching repeaters can be used for operating contacts, NAMUR proximity sensors or optocouplers. Models are available with one or two channels. The intrinsically safe digital input is always galvanically separated from the output and auxiliary power. The channels in the two-channel devices are galvanically separated. Certain variants transmit frequencies of up to 10 kHz and the output signal can be inverted.

### Technical Data

#### Explosion Protection

Ex interface zone	0 1 2 20 21 22
IECEX gas certificate	IECEX BVS 09.0041 X
IECEX gas explosion protection	Ex [Ex ia Ga] IIC
IECEX dust certificate	IECEX BVS 09.0041 X
IECEX dust explosion protection	[Ex ia Da] IIIC
ATEX gas certificate	DMT 02 ATEX E 195 X
ATEX gas explosion protection	Ex II (1) G Ex [Ex ia Ga] IIC
ATEX dust certificate	DMT 02 ATEX E 195 X
ATEX dust explosion protection	Ex II (1) D [Ex ia Da] IIIC
FMus certificate	FM16US0122X
cFM certificate	FM16CA0067X
Marking cFMus	AIS Class I,II,III, Div. 1, Groups A,B,C,D,E,F,G; Class I, Zone 0, [AEx ia]/[Ex ia] IIC T4 at Ta = 70°C See Doc. 91 706 02 31 1
EAC certificate	EAEU RU S-DE.HA91.B.00100/20
EAC gas explosion protection	Ex [Ex ia Ga] IIC X
EAC dust explosion protection	Ex [Ex ia Da] IIIC X
Certificates	ATEX (BVS), Brazil (ULB), Canada (FM), Canada (UL), EAC (ENDCE), IECEX (BVS), India (PESO), Korea (KGS), SIL (exida), USA (FM), USA (UL)
Ship approval	CCS, EU RO MR (DNV GL)
Notes	CCC, UKCA certificate available from 2022 onward

# Isolator Barriers

## Switching repeater

Ex i field circuit

9170/21-12-21s Art. No. 203281



### Explosion Protection

Installation	in safe area
Further information	see respective certificate and operating instructions

### Safety Data

Max. voltage $U_o/V_{oc}$	9.6 V
Max. current $I_o/I_{sc}$	10 mA
Max. power $P_o$	24 mW
Max. permissible external capacitance $C_o/C_a$ for IIC	3.6 $\mu$ F
Max. permissible external capacitance $C_o/C_a$ for IIB	26 $\mu$ F
Max. permissible external inductance $L_o/L_a$ for IIC	350 mH
Max. permissible external inductance $L_o/L_a$ for IIB	1000 mH
Internal capacitance	2.42 nF
Internal inductance	Negligible
Safety-related max. voltage	253 V

### Functional Safety

SIL	2
-----	---

### Electrical Data

Number of channels	2
LFD relay	No

### Auxiliary Power

Auxiliary power	110 to 230 V AC
Min. auxiliary power nominal voltage	120 V
Max. auxiliary power nominal voltage	230 V
Auxiliary power voltage range	96 to 253 V
Nominal current	18 mA
Power consumption	2.8 W
Max. power dissipation	2 W
Undervoltage monitoring	Yes
Operation indication	Green "PWR" LED
HE frequency range	48 ... 62 Hz

### Galvanic Isolation

Test voltage as per standard	IEC EN 60079-11
Ex i input to output	1.5 kV AC
Ex i input to auxiliary power	1.5 kV AC
Galv.sep. Ex i input to FMC	1.5 kV AC
Ex i input to Ex i input	500 V AC
Test voltage as per standard	EN 50178
Output to auxiliary power	1,1 kV AC
Output to output	1,1 kV AC

### Input

Input signal	As per EN 60947-5-6 (NAMUR)
Input current for ON	$\geq 2.1$ mA

# Isolator Barriers

## Switching repeater

Ex i field circuit

9170/21-12-21s Art. No. 203281



### Input

Input current for OFF	$\leq 1.2 \text{ mA}$
Hysteresis	Approx. $0.2 \text{ mA}$
Input internal resistance $R_i$	$1000 \Omega$
Input for open-circuit voltage $U_a$	$8,2 \text{ V}$
Short-circuit current	$\leq 8.2 \text{ mA}$

### Output

Output per channel	1 change-over contact – power relay
Output	1 change-over contact – power relay
Min. output load condition	$12 \text{ V} / 0.1 \text{ mA}$
Max. output DC load condition	$250 \text{ V} / 2 \text{ A}$
Max. output AC load condition	$250 \text{ V} / 4 \text{ A}$
Output switching capacity	$50 \text{ W} / 1000 \text{ VA}$
Output electrical service life	$1 \times 10^5$ operating cycles at $250 \text{ V}/4 \text{ A}$
Output mechanical service life	$15 \times 10^6$ operating cycles
Recommended back-up fuse	$\leq F 4 \text{ A AC}/2 \text{ A DC}$
Output switching frequency	$6 \text{ Hz}$
Switching delay ON/OFF	$10 \text{ ms}$
Switching delay OFF/ON	$10 \text{ ms}$
INV switch user adjustment	Activated/deactivated
Switching state indication	Yellow "OUT" LED per channel
Fault message contact switching capacity	$30 \text{ V} / 100 \text{ mA}$
LF switch user adjustment	Activated/deactivated
Indication of line fault	Red "LF" LED for each channel
Wire breakage error detection	$I_E < 0.05 \text{ to } 0.35 \text{ mA}$
Short circuit error detection	$R_E < 100 \text{ to } 360 \text{ ohm}$
Line fault and loss of power signalization	Contact ( $30 \text{ V} / 100 \text{ mA}$ ) closed to ground in case of fault pac-Bus, floating contact ( $30 \text{ V} / 100 \text{ mA}$ )

### Ambient Conditions

Ambient temperature °C	$-20 \text{ °C} \dots +70 \text{ °C}$ (Single device) $-20 \text{ °C} \dots +60 \text{ °C}$ (Group assembly)
Ambient temperature °F	$-4 \text{ °F} \dots +158 \text{ °F}$ (Single device) $-4 \text{ °F} \dots +140 \text{ °F}$ (Group assembly)
Storage temperature °C	$-40 \text{ °C} \dots +80 \text{ °C}$
Storage temperature °F	$-40 \text{ °F} \dots +176 \text{ °F}$
Max. relative humidity	95%
Use at the height of	$< 2000 \text{ m}$
Electromagnetic compatibility	Tested to the following standards and regulations: EN 61326-1 Use in industrial environment; NAMUR NE 21

### Mechanical Data

Degree of protection (IP)	IP30
Degree of protection (IP) terminals	IP20
Fire resistance (UL 94)	V0
Enclosure material	Polyamide
Grid dimension	$17.6 \text{ mm}$
Width	$17.6 \text{ mm}$

# Isolator Barriers

## Switching repeater



Ex i field circuit

9170/21-12-21s Art. No. 203281


### Mechanical Data

Width, inches	0.69 in
Height	114.5 mm
Height, inches	4.51 in
Length	108 mm
Length, inches	4.25 in
Weight	0.225 kg
Weight	0.5 lb

### Mounting / Installation


Mounting type	DIN rail NS35/15, NS35/7.5
Mounting orientation	Vertical Horizontal
Connection type	Screw terminal
Min. rigid conductor cross section	0.2 mm <sup>2</sup>
Max. rigid conductor cross section	2.5 mm <sup>2</sup>
Min. flex conductor cross section	0.2 mm <sup>2</sup>
Max. flex conductor cross section	2.5 mm <sup>2</sup>
Connection cross-section AWG	24 – 13

### Technical Drawings – Subject to Alterations

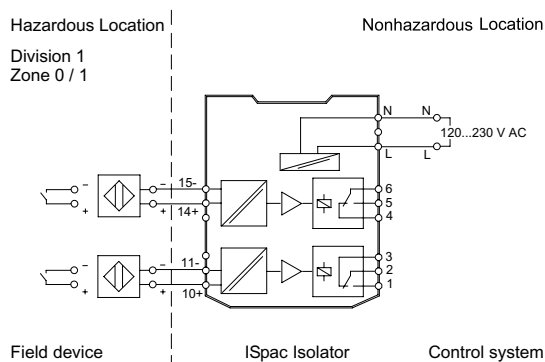

Connection diagram 9170/21-11-21

### Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

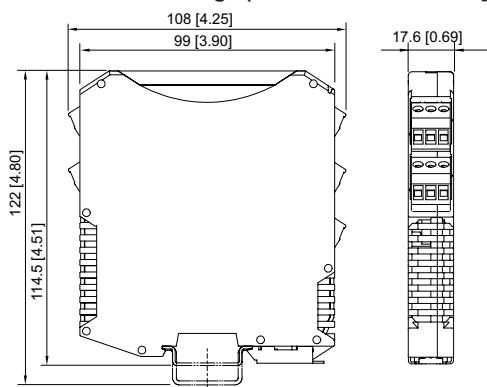

ISpac Series 9146, 9147, 9160, 9162, 9163, 9165, 9167, 9170, 9172, 9175, 9176, 9180, 9182, 9193, ISbus Series 9412 with screw terminal

### Accessories

# Isolator Barriers

Switching repeater


Ex i field circuit

9170/21-12-21s Art. No. 203281



## Resistance coupling element

Art. No.



Connection of additional contacts in the Ex area as well, in order to enable short circuit and open circuit detection.

105944

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.